


I - 48W Linear PSU

A comprehensive range of DIN rail mounting linear regulated power supplies from 1 to 48 watts

All units are housed in a polycarbonate case and suitable for mounting on standard 35mm DIN rail

- **Reliable & fully rated**
- **Low noise linear design**
- **Compact design**
- **Easy installation**
- **Low ripple**
- **D.C output LED indicator**
- **Input and output fuses**
- **Short circuit and overload protection**

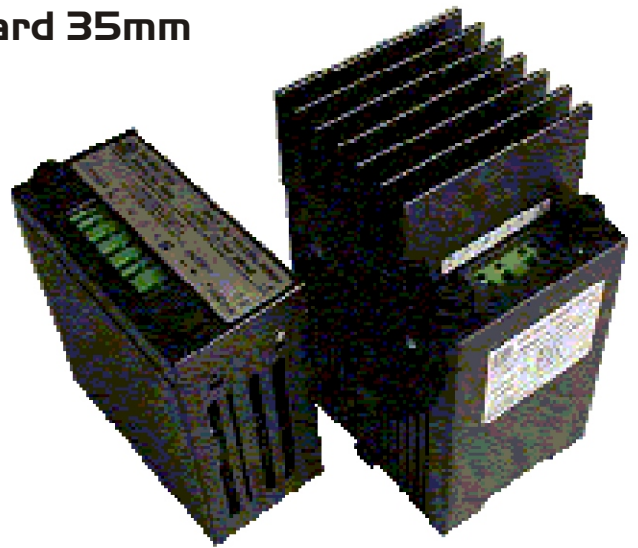

R3 Part No.	V a.c in	V d.c out	I out (A)	EMS ref
00-3601	115/230	5	0.2	D601
00-3602	115/230	5	0.5	D602
00-3603	115/230	12	0.1	D603
00-3604	115/230	12	0.2	D604
00-3605	115/230	12	0.4	D605
00-3606	115/230	15	0.1	D606
00-3607	115/230	15	0.3	D607
00-3608	115/230	24	0.1	D608
00-3609	115/230	24	0.2	D609
00-3610	115	12	1	D610
00-3611	230	12	1	D611
00-3612	115	24	0.5	D612
00-3613	230	24	0.5	D613
00-3614	115	24	1	D614
00-3615	230	24	1	D615
00-3616	115	24	2	D616
00-3617	230	24	2	D617

Input frequency	50/60 Hz
Load regulation	<200mV
Line regulation	<100mV
Ripple	10mV pk-pk typ.
Operating temp range	0 deg C to + 50 deg C

Dimensions	H	W	D	Wt (Kg)
00-3601 to 00-3609	102	50	116	0.5
00-3610 to 00-3617	75	90	155	2.25



**Building H4b, Westcott Venture Park
Westcott, Aylesbury, Bucks, HP18 OXB
T: 01296 658300
F: 01296 658301
Web: www.r3technology.co.uk
Email: sales@r3tech.co.uk**